


Electronic-module

Series **SM12**

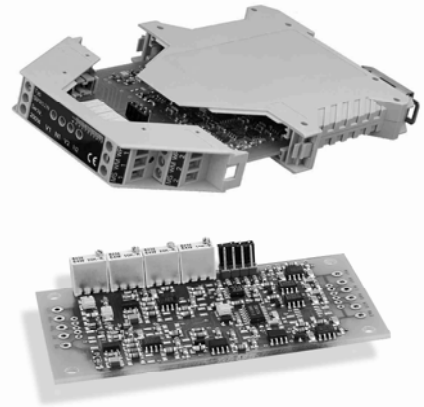

- **Electronic board with ASIC SM17**
- **To use with max. two inductive transducers**
- **Also available in snap-on mounting cases**

Construction and operating principle

The module series SM12 contains our ASIC SM17 for use with one or two inductive sensors. The module supplies the sensors with a stabilised carrier frequency and demodulates the measuring signal into a DC voltage or current signal proportional to the measuring stroke or angle. The gain could be preset by jumpers, the fine adjustment could be done by trimmers.

Standard version:

Type	output	supply voltage U_B *	mid
SM121	0 .. 20 mA	21,5 .. 32V	10 mA
SM123	4 .. 20 mA	21,5 .. 32V	12 mA
SM125	± 10 V	± 12 .. ± 16 V	0 V
SM127	0 .. 10 V	21,5 .. 32V	5 V

* Pole reversal protection

Technical data:

Operating frequency	10 kHz
Amplitude	10 V_{p-p} sine-wave
Zero-point	$\pm 10\%$ adjustable
Sensitivity	adjustable by jumper+ trimmer
Temperature drift	$< 0,005\% / ^\circ C$
Measurement frequency	800 Hz
Temperature range	$-20^\circ C$.. $+85^\circ C$

Current output (SM121 / SM123):


Supply current I_B	1 channel: max. 70 mA 2 channel: max. 110 mA
Load resistance R_L	0..500 Ω
Residual ripple	$< 0,005$ mA $_{p-p}$
Dependence on V_S	$< 0,05\%$ at $\Delta U_B = 1$ V
Dependence on R_L	$< 0,001\%$ at $\Delta R_L = 100\Omega$

Voltage output (SM125 / SM127):


Supply current I_B	1 channel: max. 50 mA 2 channel: max. 90 mA
Permissible load R_L	≥ 2 k Ω (short-circuit proof)
Residual ripple	< 5 mV $_{p-p}$
Dependence on V_S	$< 0,05\%$ at $\Delta U_B = 1$ V
Residual voltage SM127	max. 0,2 VDC

The standard version is equipped with jumper and trimmer.

Block diagram

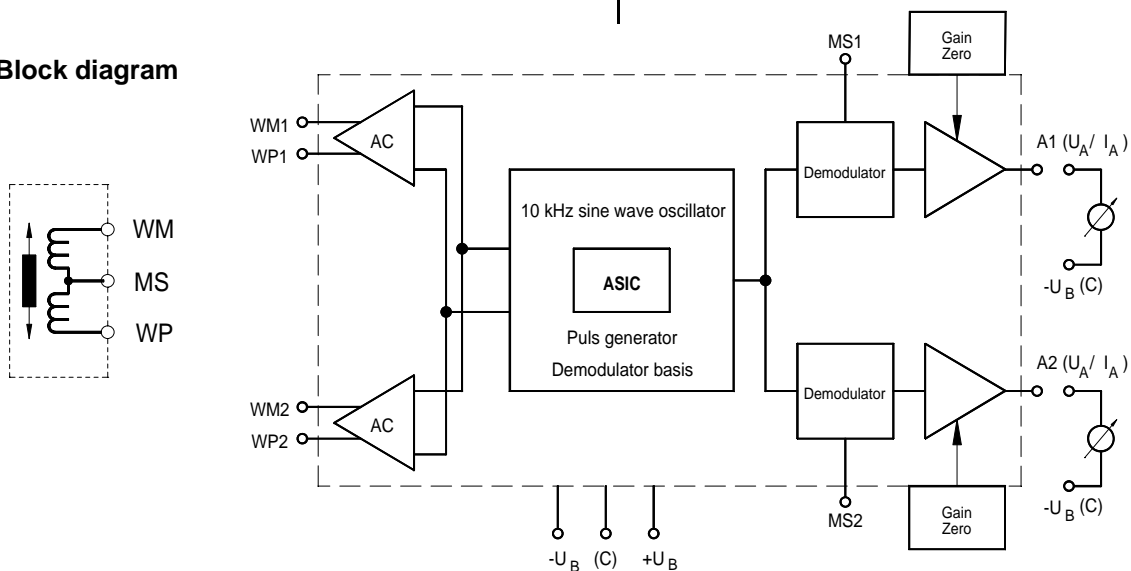

Basic gain multiplier
Jumper J1: channel 1
Jumper J2: channel 2

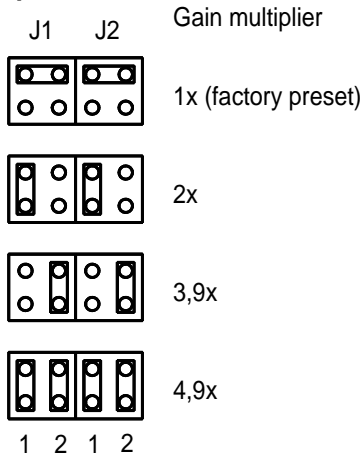

Fine adjustment trimmer V1/V2


Typ	gain
SM121	2,4 .. 7,6 mA/V
SM123	1,9 .. 6,0 mA/V
SM125	2,3 .. 7,5 V/V
SM127	1,2 .. 3,8 V/V

How to calculate the basic gain multiplier

Inductive sensor SM200.8; stroke 8mm; sensitivity 440 mV/mm; connect to an electronic module SM121; Jumper gain multiplier 1x; trimmer gain 2,4 .. 7,6 mA/V

Current output: $0,44 \text{ V/mm} \times (2,4 \dots 7,6) \text{ mA/V} = (1,05 \dots 3,35) \text{ mA/mm}$

Dimension(mm) and connection:

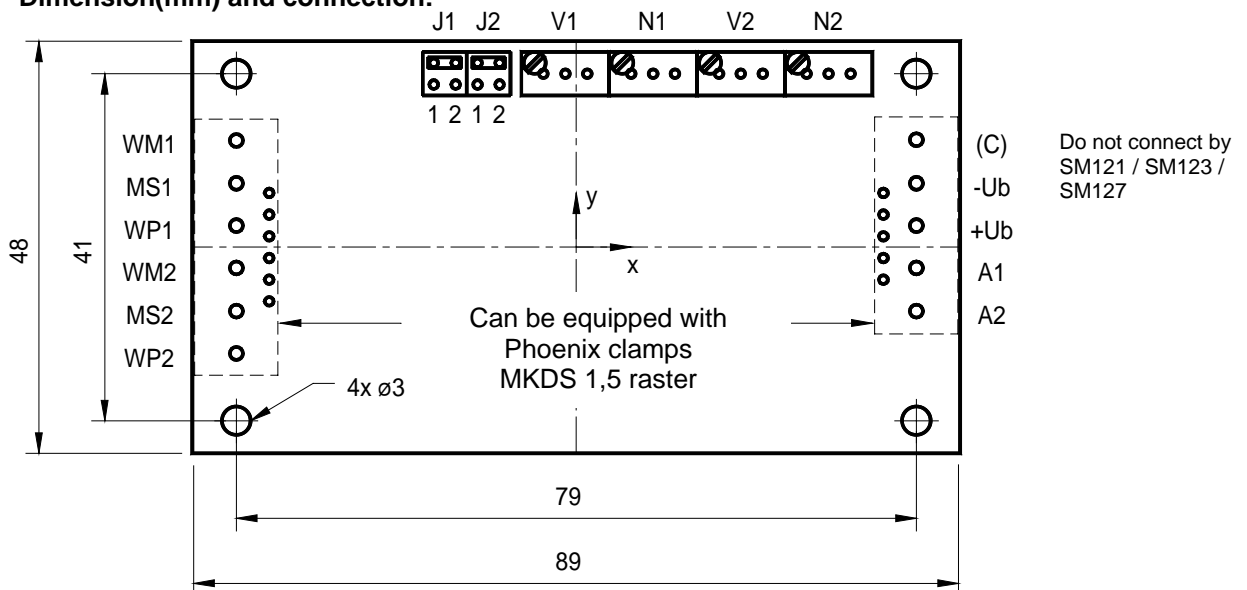


Coordinating of connection pins:

Raster dimension 1/10 inch

Pin	X	Y
WM1 bis WP2	-14	2,5 / 1,5 / 0,5 / -0,5 / -1,5 / -2,5
(C) bis A2	14	2,5 / 1,5 / 0,5 / -0,5 / -1,5
V1	-1,5 / -0,5 / 0,5	8
N1	2,5 / 3,5 / 4,5	8
V2	6,5 / 7,5 / 8,5	8
N2	10,5 / 11,5 / 12,5	8
J1	-6,5 / -5,5	8,5 / 7,5
J2	-4,5 / -3,5	8,5 / 7,5

EN-case for snap-on mounting:

Order code: SM12x.1(2)N case Phoenix ME17,5 frontside trimmers

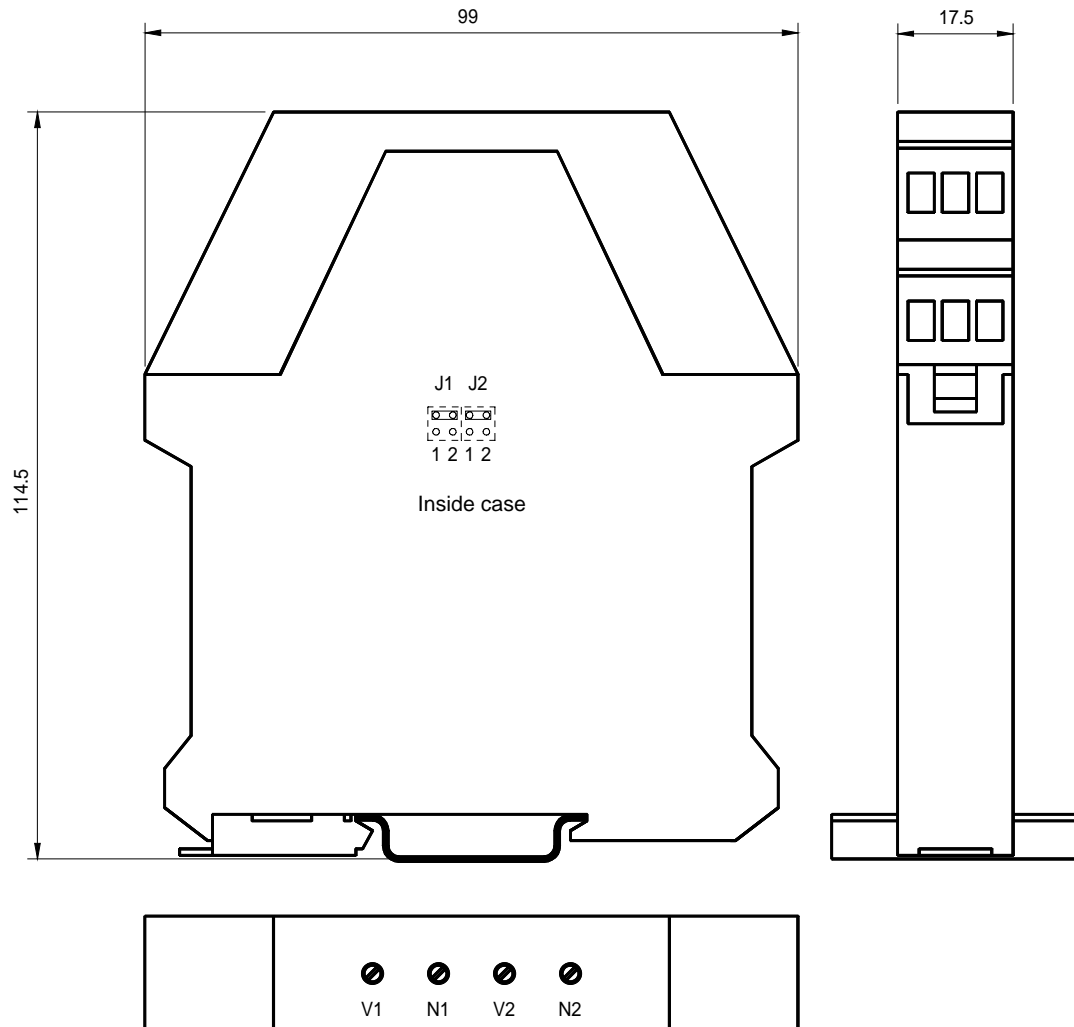

Other versions:

- Equipped with Phoenix clamps
- Without trimmer
- Other supply voltage and output signals

Your Distributor



a.b.jödden gmbh
 Europark Fichtenhain A 13a
 47807 Krefeld, Germany
 Phone +49 2151 516259 0
 Fax +49 2151 516259 20
 info@abjoedden.de
 www.abjoedden.de